

+

**UTILITY PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

2664.11

First Named Inventor or Application Identifier

MARK J. FRAZER, ET AL.

Express Mail Label No.

APPLICATION ELEMENTS See MPEP chapter 600 concerning
utility patent application contents.**ADDRESS TO:**Commissioner for Patent
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.3. ☒ Specification Total Pages 4. ☒ Drawing(s) (35 USC 113) Total Sheets 5. ☒ Oath or Declaration Total Pages a. ☒ Newly executed (original or copy)b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).6. ☒ Application Data Sheet. See 37 CFR 1.767. ☐ CD-ROM or CD-R in duplicate, large table or Computer
Program (Appendix)8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies); orii. ☐ paperc. ☐ Statements verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**9. ☐ Assignment Papers (cover sheet & document(s))10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)11. ☐ English Translation Document (if applicable)12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations13. ☐ Preliminary Amendment14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/_____
Prior application information: Examiner Group/Art Unit: _____**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

+

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	21 -20 =	1	X \$ 18.00 =	\$ 18.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	3 -3 =	0	X \$ 80.00 =	\$000.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$270.00 =	\$000.00
				BASIC FEE (37 CFR 1.16(a))	\$710.00
Total of above Calculations =					\$728.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$728.00

19. Small entity status


- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ USPTO Credit Card Payment Form in the amount of \$728.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$_____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☐ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	RICHARD P. BAUER, REG. NO. 31,588
SIGNATURE	
DATE	November 28, 2000

RPB/lip

INVENTOR INFORMATION

Inventor One Given Name: Mark J.

Family Name: FRAZER

Postal Address Line One: Suite 500, 205 Richmond St. W.

City: Toronto

State or Province: Ontario

Country: Canada

Postal or Zip Code: M5V 1V3

Citizenship: Canada

Inventor Two Given Name: Frank M.

Family Name: VAN HEESWYK

Postal Address Line One: Suite 500, 205 Richmond St. W.

City: Toronto

State or Province: Ontario

Country: Canada

Postal or Zip Code: M5V 1V3

Citizenship: Canada

Inventor Three Given Name: Frank

Family Name: KSCHISCHANG

Postal Address Line One: Suite 500, 205 Richmond St. W.

City: Toronto

State or Province: Ontario

Country: Canada

Postal or Zip Code: M5V 1V3

Citizenship: Canada

Inventor Four Given Name: Ramesh

Family Name: MANTHA

Postal Address Line One: Suite 500, 205 Richmond St. W.

City: Toronto

State or Province: Ontario

Country: Canada

Postal or Zip Code: M5V 1V3

Citizenship: Canada

Inventor Five Given Name: W. Martin

Family Name: SNELGROVE

Postal Address Line One: Suite 500, 205 Richmond St. W.

City: Toronto

State or Province: Ontario

Country: Canada

Postal or Zip Code: M5V 1V3

Citizenship: Canada

CORRESPONDENCE INFORMATION

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

[illegible]

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

[illegible]

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

BOOK REVIEW

Communication Structure For Multiplexed Links

FIELD OF THE INVENTION

The present invention relates to a communication structure and method. More specifically, the present invention relates to a communication structure and method for transmitting
5 data, which can include both voice data and non-voice, "pure" data, over a multiplexed link.

BACKGROUND OF THE INVENTION

Many communications systems are known. Early communications systems were connection-based, in that a connection was physically established through the system between the communicating nodes. For example, in the early versions of the public switched telephone network
10 (PSTN), users were provided a point-to-point connection to other users through switchboards, switches and trunks. More recently, the PSTN has employed multiplexed lines that are shared, through at least some part of the network, by multiple users, but which still provide a fixed amount of bandwidth and network capacity to each user for their voice data connection, these bandwidth and network capacities being selected as meeting the anticipated maximum requirements for a common telephone voice
15 conversation, typically referred to as toll quality.

Data communications systems for "pure data" (i.e. - data transmissions other than voice) have also been built which are connectionless. Connectionless systems generally operate on a best effort and/or statistical basis to deliver data via a suitable, but not necessarily fixed, route between the users, at best effort transmission rates and/or error rates. An example of a connectionless system is a
20 packet network such as the Internet wherein the network capacity is shared amongst the users.

More recently, attempts have been made to combine connectionless and connection-like services in a single communication system. For example, much interest has been expressed recently in Voice over IP (VoIP) through the Internet. However, it has proven difficult and/or costly to create a communication system which can meet both the connection-like requirements of VoIP (voice data
25 requiring a moderate data rate and having some tolerance for errors, but requiring low latency) and connectionless requirements of pure data (often utilizing a high, bursty data rate and having a relatively high tolerance to latency but little tolerance for errors).

Attempts have been made to provide a connection-like mechanism via the Internet. One such attempt is the ReSerVation (RSVP) Protocol proposed by some vendors and which allows

network capacity to be "reserved" at routers and switches to establish a "virtual" connection through the Internet to better ensure that desired quality of service (QoS) levels will be met for the virtual connection. However, support for RSVP must explicitly be implemented within an application and at each switch and/or router involved in the virtual connection, which has been difficult to achieve to date.

5 Further, there is a significant amount of time and overhead required to set up an RSVP connection which can negate the benefits of an RSVP connection for connections of relatively short duration. Even when implemented, RSVP does not typically result in an efficient usage of network capacity as the maximum anticipated bandwidth and/or network capacity requirements must be reserved for the duration of the connection, even if they are not used, or are not used continuously. Thus, in many
10 circumstances, reserved network resources are sitting idle, or are under utilized, for some portion of time. Further, RSVP does not include any incentive mechanism by which applications/users are encouraged to only make effective use of network resources, i.e. – unreasonable requests for resources can be made by a user or application as there are generally no economic or other disincentives for doing so.

15 Such difficulties are exacerbated when the links on which the network, or a portion of the network, is implemented involve a multiplexed link of expensive and/or limited bandwidth. In such cases efficient utilization of bandwidth and/or network resources is very important and RSVP or similar strategies have difficulty in meeting desired efficiencies. As used herein, the term multiplex and/or multiplexed link are intended to comprise any system or method by which a link is shared amongst
20 users. Examples of such multiplexed links include wired or wireless links employing multiplexing systems such as TDMA, CDMA, OFDM, FDMA or other arrangements.

A specific prior art example of a communication system providing digital voice transmission over a multiplexed wireless link is a PCS (Personal Communication System) cellular system. Such systems can employ a multiplexing technique such as CDMA, TDMA, hybrid systems
25 such as GSM, or other strategies to allow multiple callers to share the wireless link between the cellular base station and the PCS mobile units in both the upstream (mobile to base station) and downlink (base station to mobile) directions. One popular such system is the CDMA-based IS-95 cellular system in use in North America, South Korea and Japan.

While IS-95 based systems, or the like, have been very successful at handling voice
30 communications, attempts to provide pure data services over such systems have experienced less success. To date, one approach has been that an assignable channel, from a limited set of such

09722525 "14300

channels, must be dedicated to each user to which pure data is to be sent. This does not generally make efficient use of the available IS-95 bandwidth, as data rates and requirements vary much more widely than does a typical voice communication for which the channels were designed.

Other attempts have been made to offer data communication systems which address these problems and which are backward compatible with IS-95, but to date no system has been created which provides effective usage of available, limited, bandwidth on a multiplexed link for data transmissions including voice data and pure data.

It is therefore desired to have a communication structure and method of providing communications, including both voice data and pure data, over wireless or other multiplexed links.

10 SUMMARY OF THE INVENTION

It is an object of the present invention to provide a novel communication structure and method which obviates or mitigates at least some of the above-identified disadvantages of the prior art.

According to a first aspect of the present invention, there is provided a communications structure for communicating between at least one network node and at least two subscriber stations through a multiplexed link, said structure comprising:

a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said network node and one of said at least two subscriber stations; and

a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of data packets from said network node to said at least two subscriber stations.

According to another aspect of the present invention, there is provided a method of transmitting data from a network node to a plurality of subscriber stations over a multiplexed link, comprising the steps of:

(i) determining the requirements for a first data transmission intended for a subscriber station;

(ii) selecting the use of a dedicated channel or a shared channel to effect said first data transmission in accordance with said determined requirements; and

(iii) if a dedicated channel is selected, obtaining a dedicated channel when available and transmitting said first data transmission thereon and if a shared channel is selected, transmitting

said first data transmission on said shared channel in the form of data packets addressed to said subscriber station.

According to another aspect of the present invention, there is provided a method of managing a transmission structure for transmitting data from a network node to a plurality of subscriber stations over a multiplexed link, comprising the steps of:

(i) allocating a portion of the bandwidth of said multiplexed link to create a number of dedicated channels, each of which can be assigned to a different one of said subscriber stations;

(ii) allocating a portion of the remaining bandwidth of said multiplexed link to a shared channel which can communicate with a plurality of said subscriber stations;

(iii) monitoring the requirements for dedicated channels in said structure and reallocating bandwidth of said multiplexed link between said shared channel and said dedicated channels to create or remove dedicated channels as required.

The present invention provides a communication structure and method to allow connection-like and connectionless communications to be provided on a multiplexed communication link. The structure and method can make efficient use of available bandwidth and/or network resources while providing both types of communication. Connection-like communications can be provided by a dedicated channel having allocated bandwidth dedicated to the communication while connectionless communication can be provided by a shared channel through which data can be transmitted to users. In an embodiment, the shared channel transmits frames of packets addressed to the users. The allocation of bandwidth between the dedicated channels and the shared channel can be fixed, or can be managed to meet network or network operator requirements. The structure and method can also be managed by the network operator to permit prioritization of some communications over others.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

Figure 1 shows a wireless local loop system employing a multiplexed radio link;

Figure 2 shows a prior art communication system;

Figure 3 shows a communication structure in accordance with an embodiment of the present invention;

Figures 4a and 4b show the structure of Figure 3 wherein the numbers of dedicated

channels are changed to vary the allocation of bandwidth between a shared channel and dedicated channels;

Figure 5a shows an example of the structure of Figure 3 wherein a minimum bandwidth allocation has been defined for the shared channel;

5 Figure 5b shows the structure of Figure 5a when an additional dedicated channel has been created and the bandwidth of the shared channel has been decreased accordingly;

Figure 5c shows the structure of Figure 5a when the shared channel is reduced to its selected minimum level and the remainder of the bandwidth of the system has been allocated to assigned dedicated channels; and

10 Figure 6 shows the structure of Figure 3 wherein two shared channels are provided.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows a wireless local loop (WLL) system, indicated generally at 20. System 20 includes at least one network node, such as base station 24, which is connected to one or more networks, such as the PSTN and/or the Internet, and/or to one or more other base stations 24, via a back
15 haul 28. Backhaul 28 can be any suitable communication link such as a T1, T3, E1, E3, OC3, radio or microwave link. Each base station 24 communicates with a plurality of subscriber stations 32 via a multiplexed radio link 52 shared between subscriber stations 32. In Figure 1, each subscriber station 32 can provide simultaneous connections to at least one telephony device 36, such as a telephone set or facsimile machine, and a data device 48 such as a computer, video conferencing system, etc.

20 Radio link 52 employs a suitable multiplexing technique, such as TDMA, FDMA, OFDM, CDMA, hybrids thereof or other multiplexing techniques to allow simultaneous use of radio link 52 by base station 24 and more than one subscriber station 32. These multiplexing techniques can be used to "channelize" and/or otherwise share a radio link.

In prior art systems where, for example, subscriber stations are mobile telephones, a
25 base station can assign the usage of a portion of a radio link to a subscriber station, on an as-needed basis. For example, in a system employing IS-95, the radio link is channelized into a sixty-four channels in the downlink from the base station to the subscriber station. Some of these channels are dedicated for control and signaling purposes between the base station and subscriber stations, and the balance form a pool of traffic channels, one or more of which can be assigned as needed, to
30 communicate with a subscriber station.

The IS-95 communication system suffers from certain disadvantages. For example, the channels are of fixed pre-selected data rate (e.g. - 9.6 or 14.4 kilobits per second, although different amounts of repetition can be employed, resulting in different effective rates) and use of a traffic channel is reserved for the duration of the connection, even if the connection is not presently using the link resources (bandwidth and/or code space, etc.) allocated to the channel. It is not unusual that a voice conversation includes relatively long pauses wherein no information is transmitted and channel bandwidth is essentially wasted (although in CDMA, this results in a desirable reduction in interference between users).

When connectionless services are considered, this problem is much worse as transmissions of pure data to a data device, such as a computer, can comprise one or only a few packets that typically arrive in bursts, rather than at a steady rate. A channel established for such a connectionless service will therefore typically not use a large part of its allocated link resources, yet these unused resources are reserved for the duration of that connection and are unavailable for use elsewhere in the system until the channel is freed. In addition, there is a relatively significant overhead required to assign a channel between a base station and a subscriber station. Thus, for connectionless services between a base station and a subscriber station, the time and/or network processing requirements for establishing a channel can be unreasonable for short bursts of packets.

Figure 2 shows a prior art downlink (from base station to users) structure 100 for the radio-link used in IS-95 CDMA systems. Structure 100 represents the bandwidth available which typically is arranged into as many as sixty-four channels. Channels 104, 108 and 112 are control channels used to establish and maintain communications with users. For example, channel 104 can be the IS-95 pilot channel, channel 108 the IS-95 paging channel and channel 112 the IS-95 synchronization channel. Additional, different or fewer control channels can be employed that, for example, are transmitted to all (typically mobile) users. Channels 116₍₁₎ through 116_(x) are the 'x' traffic channels which carry user (non-control) data between base station and the users. In IS-95A, traffic channels 116 all have the same data rate, while in IS-95B, the data rate of channels 104 through 116_(x) can be varied, resulting in different total numbers of channels. It is important to note that structure 100 is essentially part of a connection-based system, in that a traffic channel 116, and its associated resources, are allocated to a user for the duration of a communication and provide a fixed amount of bandwidth, and/or data rate, for the duration of the connection.

Figure 3 shows a structure 200 in accordance with an embodiment of the present

invention which can be used, for example, as a downlink radio structure with WLL system 20 in Figure 1. In structure 200, some portion 206 of the total available bandwidth 204 is allocated to one or more control channels (such as 208, 212 and 216) and the remaining portion 220 of bandwidth 204 is allocated between a shared channel 224 and 'n' dedicated channels, 228₍₁₎ through 228_(n). As used herein, the term "bandwidth" is intended to comprise the transmission capacity of a link. Depending upon the multiplexing technique employed on a link and the physical layer of the link, transmission capacity can be allocated to users as frequency bands, spreading code space, time slots or other link resources as will be apparent to those of skill in the art and the term bandwidth is intended to comprise all of these, as appropriate.

As described in more detail below, the bandwidth allocated to shared channel 224 can be increased and the number 'n' of dedicated channels 228 correspondingly decreased, or vice versa, as required.

Shared channel 224 is a multiplexed channel in that several, or all, subscriber stations 32 in Figure 1 are capable of receiving data transmitted on it from base station 24 and shared channel 224 typically implements connectionless data transmissions to subscriber stations 32. One or more packets of data to be transmitted to a subscriber station 32 from base station 24 are assembled into a transmission frame, often along with packets addressed to other subscriber stations 32. These frames can be assembled at base station 24 from packets received via back haul 28 and/or from packets received at base station 24 from other subscriber stations 32 or can be assembled elsewhere and forwarded to base station 24 via backhaul 28. Each assembled frame is transmitted from base station 24 via shared channel 224, over radio link 52, to subscriber stations 32 and each subscriber station 32 receives the transmitted frame and examines the packets therein to identify those, if any, which are addressed to it. Packets addressed to a subscriber station 32 are then processed accordingly by the addressed subscriber station 32.

In a present embodiment of the invention, a transmission frame is ten milliseconds in length and it is intended that the construction and transmission of frames is performed on an on going basis, with a frame being constructed and readied for transmission while the preceding frame is being transmitted.

It is intended that each subscriber station 32 will continuously listen for and receive shared channel 224 and thus the time and/or network overhead processing requirements which would otherwise be required to establish a connection to a subscriber station 32 is avoided after a subscriber

station 32 is in a normal operating mode (achieved as part of the normal power-up of each subscriber station 32). In this manner, even small amounts of data (such as single packets) can be transferred from base station 24 to subscriber stations 32 in an efficient manner as no setup is specifically required for transmission of a packet to a subscriber station 32 and no reservation of bandwidth is required.

5 For connection-like services, such as voice communication or other services which have QoS requirements such as relatively low latency or other communications requiring known transmission characteristics, a dedicated channel 228 can be established, as needed, between base station 24 and a subscriber station 32. Dedicated channels 228 can be similar to the traffic channels of IS-95 and have a fixed data rate, or they can be allocated to provide different data rates as desired to, 10 for example, enable voice communication at different qualities, e.g. - toll level quality (at 16 kilobits per second (kbps)) versus CD-Audio level quality (at 128 kbps). In any case, dedicated channels 228 effectively reserve bandwidth to provide connection-like service levels for a connection between base station 24 and a subscriber station 32.

 It is also contemplated that hybrid connections can be established which employ both 15 shared channel 224 and one or more dedicated channels 228. For example, a connection which has a relatively fixed 'normal' data rate and requires low latency, but which also experiences infrequent bursts to a higher data rate, can be assigned a dedicated channel 228 sufficient for transmitting at the 'normal' data rate and any bursts can be transmitted by shared channel 224.

 Alternatively, shared channel 224 can be used to implement both connection-like and 20 connectionless services. In any event, the present invention is not limited to dedicated channels 228 providing connection-like services or shared channels 224 providing connection-less services and many suitable strategies for advantageously employing the structure of the present invention will occur to those of skill in the art.

 As mentioned above, bandwidth portion 220 is managed to allocate bandwidth between 25 shared channel 224 and dedicated channels 228. For example, in Figure 4a bandwidth portion 220, which could be enough bandwidth for fifty-four IS-95A traffic channels (fifty-four times ninety-six hundred kbps equals five-hundred and eighteen-point-four kbps), has been allocated to create forty-one dedicated channels 228 of ninety-six-hundred kbps (three-hundred and ninety-three-point-six kbps in total) and to allocate the balance of bandwidth portion 220 (one-hundred and twenty-four-point-eight 30 kbps), to shared channel 224. In Figure 4b, only eighteen dedicated channels 228 have been allocated (eighteen times ninety-six-hundred kbps equals one-hundred and seventy-two-point-eight kbps) and the

balance (three-hundred and forty-five-point-six kbps) has been allocated to shared channel 224.

While structure 200 can be configured with a fixed amount of bandwidth allocated to shared channel 224 and remaining bandwidth allocated to a fixed number of dedicated channels 228, it is contemplated that bandwidth portion 220 will be actively managed in many circumstances. By actively managing the allocation of bandwidth portion 220 between shared channel 224 and dedicated channels 228, the operator of structure 200 can meet goals appropriate to the needs of their users and/or make efficient use of the bandwidth available to them. For example, an operator can decide to prioritize providing dedicated channels 228 for voice communications over providing higher data rates on shared channel 224.

It is contemplated that in actively managing bandwidth portion 220, a minimum bandwidth allocation will be selected for shared channel 224, for example bandwidth equivalent to a data rate of fifty kbps. This minimum allocation can be selected by an operator according to the service commitments shared channel 224 must meet and the number of subscriber stations 32 that channel 224 must serve. Shared channel 224 is then always allocated at least this selected minimum amount of bandwidth.

It is further contemplated that bandwidth for a selected minimum number of dedicated channels 228 will also always be allocated. The remainder of bandwidth portion 220 will then be allocated to shared channel 224. If the network operator has prioritized the provisioning of dedicated channels 228, then when some portion of this remainder of bandwidth is subsequently required to create additional dedicated channels 228, the required bandwidth is de-allocated from shared channel 224 and allocated to the new dedicated channel(s) 228, provided that shared channel 224 is still allocated at least the selected minimum amount of bandwidth. Otherwise, the capacity of structure 200 would be exceeded and the creation of further dedicated channels 228 is inhibited.

To reduce set up time and overheads, in addition to the selected minimum number of dedicated channels 228, it is contemplated that a pool of a selected number of dedicated channels 228 (a "channel pool") will be allocated in anticipation of future needs. The dedicated channels 228 in the channel pool are allocated bandwidth but are not initially assigned to any subscriber station 32. When a new dedicated channel 228 is required by a subscriber station 32, it is assigned one of the dedicated channels 228 in the channel pool, thus avoiding the delay and/or overheads resulting from the reallocation of bandwidth from shared channel 224 to create a new dedicated channel 228.

Assuming additional bandwidth can be reallocated from shared channel 224, then a replacement dedicated channel 228 will be created and placed in the channel pool at an appropriate time. If bandwidth cannot be reallocated from shared channel 224, (because, for example, it is at the selected minimum bandwidth), then the channel pool is decreased in the number of channels until an occupied dedicated channel 228 can be freed-up and returned to the channel pool.

When the channel pool contains the selected number of dedicated channels 228, then bandwidth allocated to additional dedicated channels that are no longer required for subscriber use can be reallocated to shared channel 224. It is also contemplated that channel pool can be managed such that both a minimum and maximum number of channels can be specified for the pool, i.e. — the size of the pool can be as small as five channels, before replacement channels are added to the pool and as many as eight channels can be in the pool before bandwidth is reallocated to shared channel 224.

It is contemplated that a wide variety of other management strategies and/or refinements to the strategies mentioned above will occur to those of skill in the art. For example, no channel pool need be established if the overhead delay required to create a dedicated channel 228 can be tolerated.

Figure 5a shows a configuration of structure 200 wherein shared channel 224 has a defined minimum size (indicated in heavy solid line) but has been allocated additional bandwidth (as indicated in thin solid line). Further, in this configuration structure 200 has a channel pool of two dedicated channels 228_(a) and 228_(b) and four dedicated channels 228₍₁₎ through 228₍₄₎ assigned to subscriber stations 32. As shown, when another channel 228_(n) is to be created, it will be allocated bandwidth from shared channel 224, which is resized accordingly.

As shown in Figure 5b, when another dedicated channel 228 is required to be assigned to a subscriber, in addition to channels 228₍₁₎ through 228₍₄₎, channel 228_(a) (in this example) will be assigned as the required channel as channel 228₍₅₎, a replacement dedicated channel 228_(a) will be created and placed in the channel pool to replace the assigned channel and the bandwidth allocated to shared channel 224 will be correspondingly decreased.

As the capacity of structure 200 is approached, and shared channel 224 is reduced to its defined minimum bandwidth, unused dedicated channels 228_(a) and 228_(b) (as channels 228_(n) and 228_(n-1) in the Figure) will be assigned to subscribers, as required, and no new dedicated channels 228 will be created, allowing the channel pool to become empty, as shown in Figure 5c.

It is also contemplated that more than one shared channel 224 can be provided, if desired, in bandwidth portion 220. In such a case, as shown in Figure 6, each shared channel 224a and

224b will result in corresponding decreases in bandwidth available to dedicated channels 228 or other shared channels 224. As shown, shared channels 224a and 224b can have different amounts of bandwidth allocated to them. The allocation of bandwidth to shared channels 224 and dedicated channels 228 can be fixed, or can be managed. For example, either or both of shared channels 224a and 224b can have their allocated bandwidths increased, or decreased, accordingly as the number of dedicated channels 228 increases or decreases and/or as the bandwidth allocated to the other shared channel 224 is increased or decreased.

One reason for providing more than one shared channel 224 can include the ability to reduce transmission latency by reducing the length of the transmission frames and/or allowing multiple frames to be sent at the same time. Another reason to employ more than one shared channel 224 is to provide an upgrade path whereby "old" subscriber stations 32 that cannot cope with an increased data rate or some other new development can listen to one shared channel 224a which employs a suitable data rate or other needed technology and "new" subscriber stations 32 can listen to another shared channel 224b which employs an increased data rate or other new technology.

Another possible reason for including more than one shared channel 224 is to permit a security scheme for some subscribers. A group of subscriber stations 32 which are to receive secured communications will listen to an encrypted shared channel 224a, while the balance of subscriber stations 32 listen to a non-encrypted shared channel 224b. While packets on the non-encrypted shared channel 224b can have encrypted payloads, the entire frames of packets on the encrypted shared channel 224a can be encrypted, inhibiting traffic analysis to be performed on communications sent via channel 224a.

Yet another reason for providing more than one shared channel 224a can be that different subscriber stations 32 can have different abilities to receive the signals. Thus, one shared channel 224 can have modulation, encoding and/or transmission power levels suitable for a group of subscriber stations 32 which have good reception characteristics and a second shared channel 224b can employ a different modulation, encoding or power level suitable for another group of subscriber stations 32 which have poorer reception characteristics.

The present invention is not limited to radio links or to other links employing CDMA as a multiplexing technique. For example, the present invention can be employed for certain links operating on wired network or optical network physical layers and employing multiplexing techniques such as OFDM, TDMA, FDMA or hybrid multiplexing techniques.

The present invention provides a communication system and method which allows connection-like and connectionless communications to be provided in a manner which can make efficient use of available bandwidth and/or network resources. The system and method can be managed by the operator of a network to permit prioritization of some communications over others and/or to vary
5 bandwidth allocated between connection-like and connectionless communications as needed and/or desired.

The above-described embodiments of the invention are intended to be examples of the present invention and alterations and modifications may be effected thereto, by those of skill in the art, without departing from the scope of the invention which is defined solely by the claims
10 appended hereto.

003211 5252260

We claim:

1. A communications structure for communicating between at least one network node and at least two subscriber stations through a multiplexed link, said structure comprising:
a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said network node and one of said at least two subscriber stations; and
a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of packets from said network node to said at least two subscriber stations.
2. The structure according to claim 1 wherein said portion of the transmission capacity of said link allocated to said shared channel is fixed.
3. The structure according to claim 1 wherein said structure includes a preselected minimum number of said dedicated channels and said portion of the transmission capacity of said link allocated to said shared channel comprises the balance of said transmission capacity which is not occupied by said preselected number of said dedicated channels.
4. The structure according to claim 1 including at least two shared channels, each shared channel being operable to transmit frames of packets from said network node to said at least two subscriber stations.
5. The structure according to claim 4 wherein each of said at least two shared channels is operable to transmit said frames of packets to different ones of said at least two subscriber stations.
6. The structure of claim 4 wherein said balance of said transmission capacity is allocated unequally to each of said at least two shared channels.
7. The structure according to claim 3 wherein additional dedicated channels are created, as needed, by reallocating necessary transmission capacity of said link from at least one shared channels to such

8. The structure according to claim 7 wherein said at least one shared channel has a preselected minimum transmission capacity and reallocation of transmission capacity from said at least one shared channel to said additional dedicated channels ceases before said transmission capacity allocated to said shared channels falls below said minimum transmission capacity.

10. The structure of claim 1 wherein at least one of said plurality of dedicated channels has a different amount of said transmission capacity allocated to it than does another of said plurality of dedicated channels.

12. The structure of claim 11 wherein said radio link employs CDMA as a multiplexing technique.

(i) determining the requirements for a first data transmission intended for a subscriber station;

(iii) if a dedicated channel is selected, obtaining a dedicated channel when available and transmitting said first data transmission thereon and if a shared channel is selected, transmitting said first data transmission on said shared channel in the form of data packets addressed to said subscriber station.

14. The method of claim 13 wherein the determination in step (i) is made in consideration of the

QoS requirements of said first data transmission.

15. The method of claim 13 wherein the determination in step (i) is made in consideration of the type of data to be transmitted.

16. The method of claim 13 wherein, if a dedicated channel is selected and no such dedicated channel is available, said first data transmission is transmitted on said shared channel.

17. The method of claim 13 where in step (ii), both a dedicated channel and a shared channel are selected, an amount of said first data transmission corresponding to the transmission capacity of said dedicated channel being sent thereon and the balance of said first data transmission being sent on said shared channel.

18. A method of managing a transmission structure for transmitting data from a network node to a plurality of subscriber stations over a multiplexed link, comprising the steps of:

(i) allocating a portion of the bandwidth of said multiplexed link to create a number of dedicated channels, each of which can be assigned to a different one of said subscriber stations;

(ii) allocating a portion of the remaining bandwidth of said multiplexed link to a shared channel which can communicate with a plurality of said subscriber stations;

(iii) monitoring the requirements for dedicated channels in said structure and reallocating bandwidth of said multiplexed link between said shared channel and said dedicated channels to create or remove dedicated channels as required.

19. The method of claim 18 wherein said structure includes a preselected minimum number of dedicated channels and, in step (iii), no dedicated channels are removed when said number of dedicated channels is equal to said preselected minimum number.

20. The method of claim 18 wherein said structure includes a preselected minimum portion of bandwidth allocated to said shared channel and, in step (iii), no dedicated channels are created which would otherwise reduce the bandwidth allocated to said shared channel below said minimum portion of bandwidth.

21. The method of claim 18 wherein said structure includes a preselected minimum number of dedicated channels and a preselected minimum portion of bandwidth allocated to said shared channel and, in step (iii), no dedicated channels are created which would otherwise reduce the bandwidth allocated to said shared channel below said minimum portion of bandwidth and no dedicated channels are removed when said number of dedicated channels is equal to said preselected minimum number.

ABSTRACT

15

003217 "3232/50

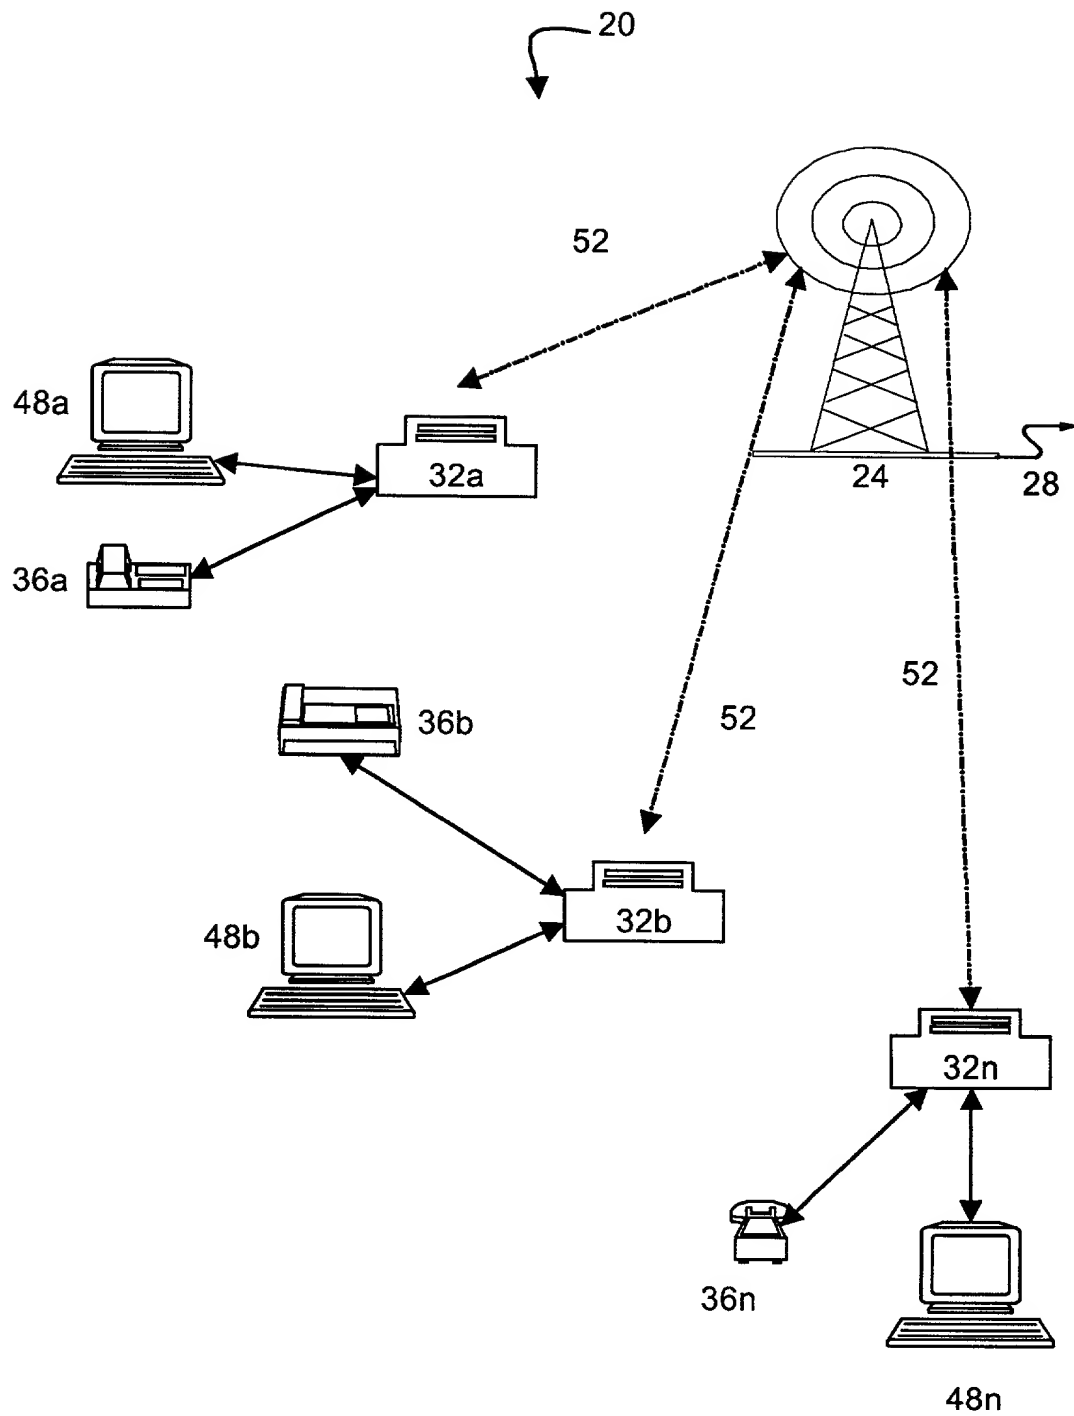


Fig. 1

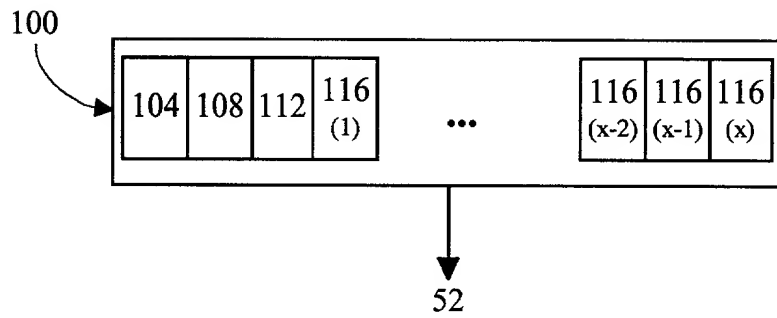


Fig. 2
(Prior art)

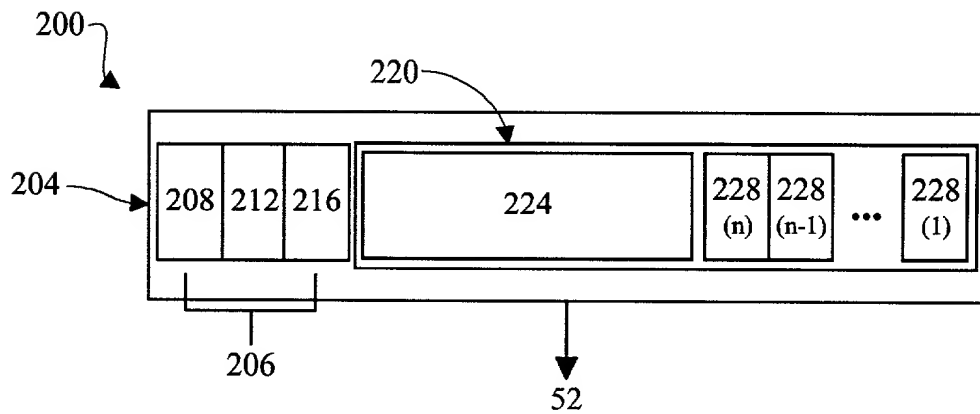


Fig. 3

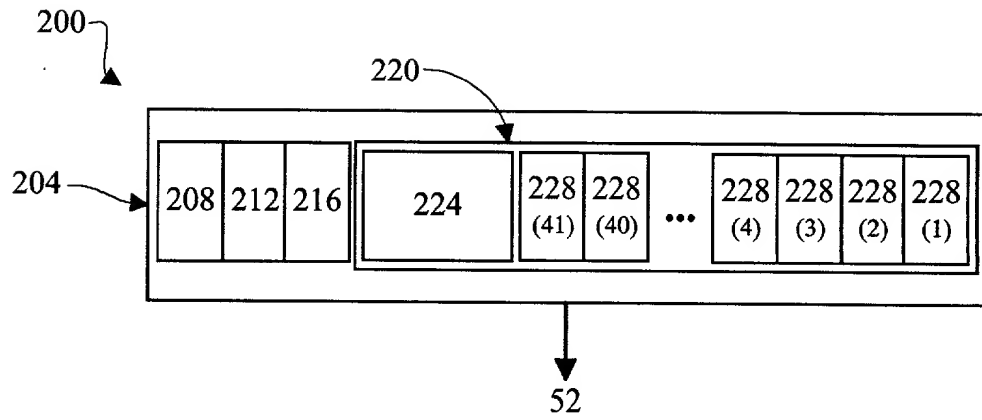


Fig. 4a

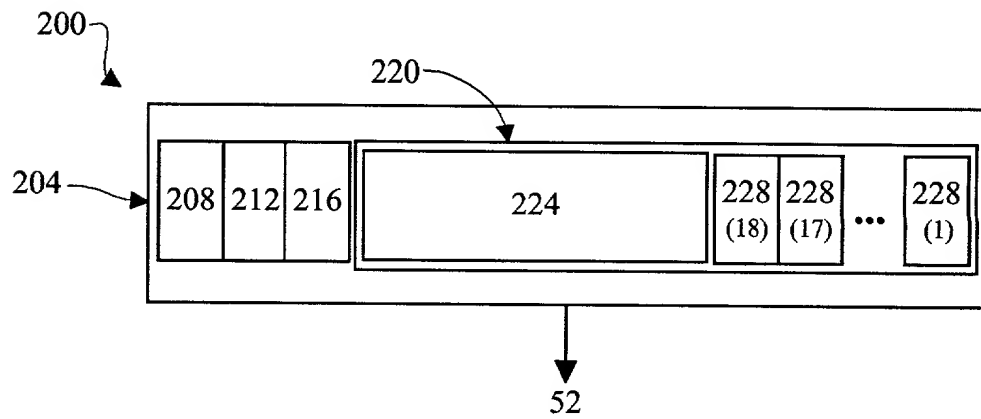
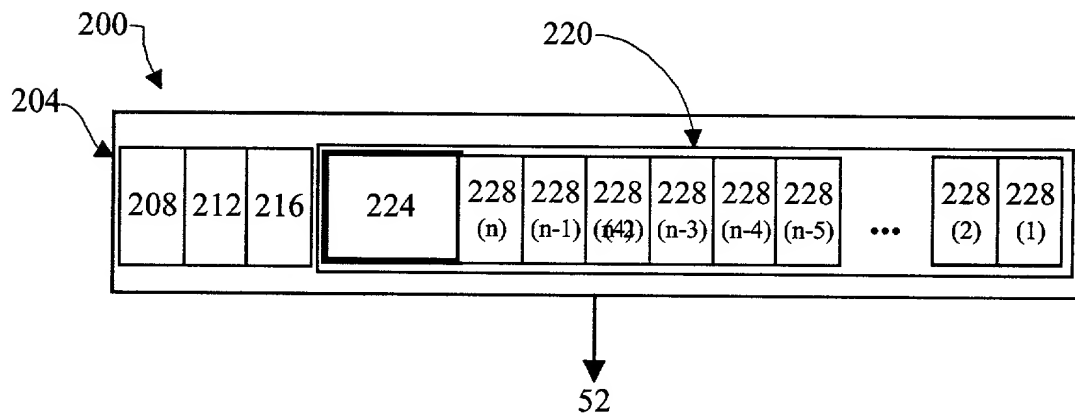


Fig. 4b



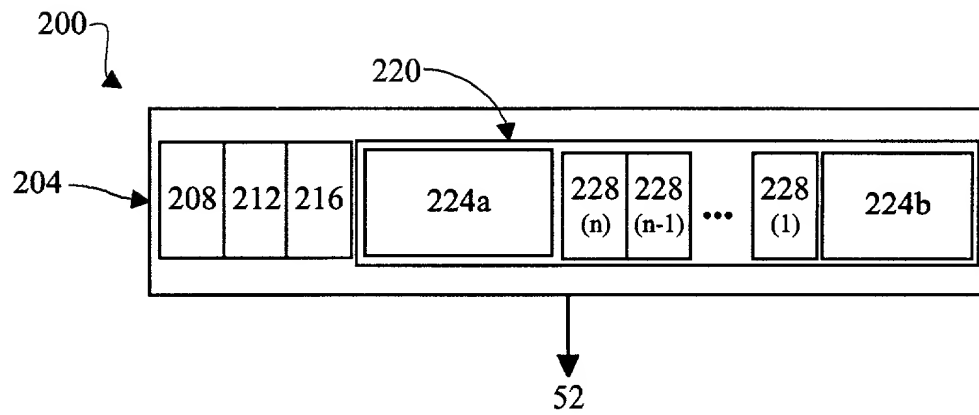


Fig. 6

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled _____

Communication Structure For Multiplexed Links

☒ the specification of which is attached hereto

☐ was filed on _____ as United States Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR ' 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. ' 119(a)-(d) or ' 365(b), of any foreign application(s) for patent or inventor's certificate, or ' 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Canada		May 15, 2000	Yes

I hereby claim the benefit under 35 U.S.C. ' 120 of any United States application(s), or ' 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. ' 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. ' 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Mark J. Frazer
Inventor's signature [Signature]
Date May 15, 2000 Citizen/Subject of Canada
Residence Toronto, Ontario, Canada
Post Office Address Suite 500, 205 Richmond St. W., Toronto, Ontario, Canada M5V 1V3

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

Post Office Address Suite 500, 205 Richmond St. W., Toronto, Ontario, Canada M5V 1V3